

# LinTronic


<http://www.lintronic.dk>

## TableTop series

Controlling PANASONIC TV by RS232



The SERIAL terminal is used when the Plasma Display is controlled by a computer.

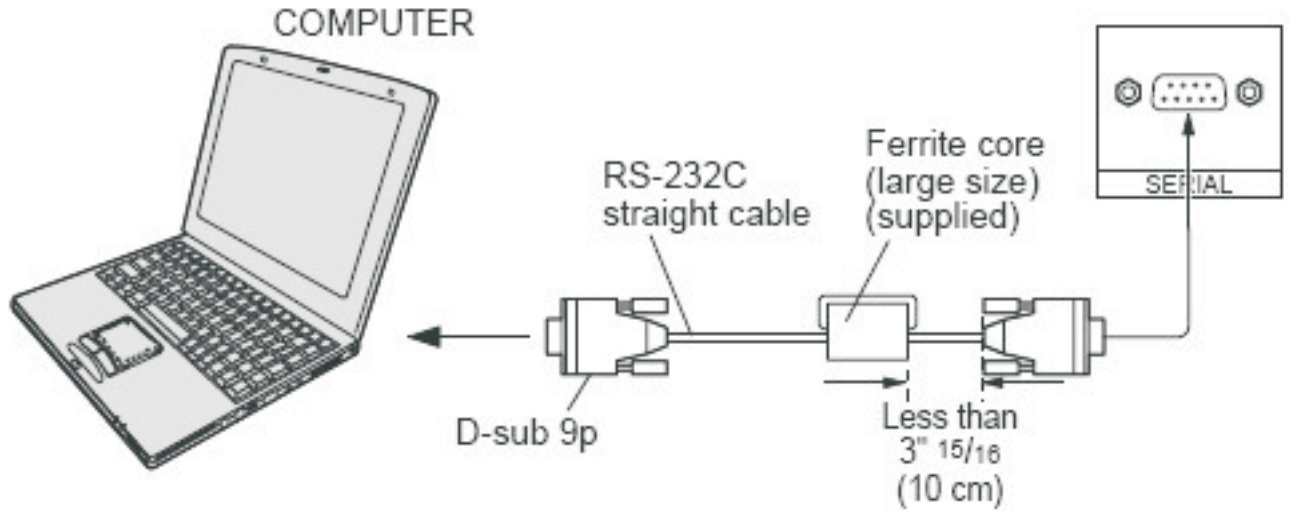

**Communication parameters**

Signal level	RS-232C compliant
Synchronization method	Asynchronous
Baud rate	9600 bps
Parity	None
Character length	8 bits
Stop bit	1 bit
Flow control	-

RS-232C Conversion cable	
D-sub 9-pin female	Details
②	R X D
③	T X D
⑤	GND
④ ⑥	Non use
⑦ ⑧	Shorted
① • ⑨	NC

